




Bilateral Mono Wheel/Mono Double Wheel Ditcher

OVERVIEW:

Ditchers with all the same technical and ditching features as conventional central mono-wheel and mono/double-wheel ditchers.

The main distinguishing feature of these models is that they can dig in different positions.

Through a simple manual or hydraulically commanded operation, the ditcher can move laterally to the right side for a shift of 95 cm from the center of the tractor, and to the left side for a shift of 80 cm.

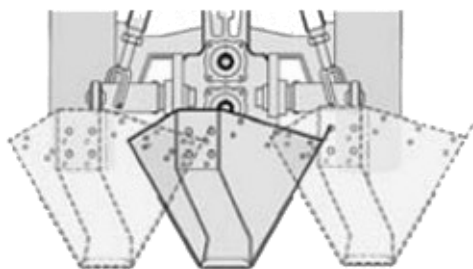

MODEL	HP POWER	km/h TRACTOR SPEED	rpm PTO	MAXIMUM WORK DIMENSIONS cm	Kg WEIGHT
MONO WHEEL					
DMR.25/BL	35-50	0,8 / 1,2	540	30° 76 18 50 80 95	365
DMR.35/BL	45-60	0,8 / 1,2	540	30° 82 18 58 80 95	435
MONO/DOUBLE WHEEL					
DMR.25B/BL	40-55	0,8 / 1,2	540	30° 80 18 55 80 95	395
DMR.35B/BL	50-70	0,8 / 1,2	540	30° 90 18 64 80 95	480
DOUBLE WHEEL					
D45B-MB/BL	60-80	0,8 / 1,2	540	30° 75 20 55 80 95	510

RMS
Engineering

ENQUIRIES & ORDERS:

Office+27 (0) 86 033 3110

Cell +27(0) 82 4687094

info@roadkingsa.co.za

www.roadkingsa.co.za